
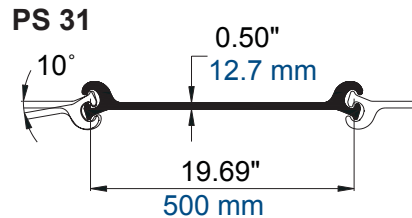


# GERDAU SHEET PILING

## PS (FLAT SHEET) PILING PROPERTIES

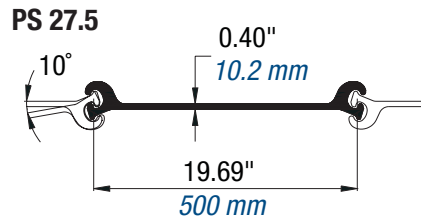

Section	Nominal Width	Depth (Height)	Wall Depth (Height)	Web Thickness	Per Single Section						Per Unit of Wall			
	in. (mm)	in. (mm)	in. (mm)	in. (mm)	Area	Weight	Moment of Inertia	Section Modulus	Total Surface Area	Nominal Coating Area*	Area	Weight	Moment of Inertia	Section Modulus
	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. <sup>2</sup> (cm <sup>2</sup> )	lbs/ft (kg/m)	in. <sup>4</sup> (cm <sup>4</sup> )	in. <sup>3</sup> (cm <sup>3</sup> )	ft <sup>2</sup> /ft (m <sup>2</sup> /m)	ft <sup>2</sup> /ft (m <sup>2</sup> /m)	in. <sup>2</sup> /ft (cm <sup>2</sup> /m)	lbs/ft <sup>2</sup> (kg/m <sup>2</sup> )	in. <sup>4</sup> /ft (cm <sup>4</sup> /m)	in. <sup>3</sup> /ft (cm <sup>3</sup> /m)
PS 27.5	19.69	2.83	3.55	0.40	13.26	45.1	5.0	3.2	4.50	3.64	8.08	27.5	3.0	1.9
	500	72	90	10.2	85.5	67.1	207	52	1.37	1.11	171.0	134.2	414	103
PS 31	19.69	2.83	3.55	0.50	14.96	50.9	5.0	3.2	4.50	3.64	9.11	31.0	3.0	1.9
	500	72	90	12.7	96.5	75.7	207	52	1.37	1.11	192.9	151.4	414	103

\*Both sides of sheet; excludes interior of interlock.

All listed dimensions are nominal. Due to rolling practices, variations in web thickness is common. Permitted variations for such dimensions are not addressed.



Grade	Minimum Interlock Strength <sup>(1)</sup>	Minimum Swing <sup>(2)</sup>
A328	16 kips/in. (2,800 kN/m)	10 degrees
A572-50	20 kips/in. (3,500 kN/m)	10 degrees
A572-60	24 kips/in. (4,200 kN/m)	10 degrees

Higher interlock strengths are available; obtainable swing may be reduced in interlock strengths above 24 kips/in (4,200 kN/m).

- (1) These minimum ultimate interlock strengths assume proper interlocking of sheets. To verify the strength of PS Sheet Piling, consider both yielding of the web and failure of the interlock.
- (2) Swing reduces 1.5 degrees for each 10 feet (3 meters) in length over 70 feet (21 meters).

As a general rule, Gerdau advises against interlocking PS sections with other producers' section(s). Gerdau PS 27.5 and PS 31 can be interlocked together. PS and Z-Piling sections should not be interlocked together.